


UB-05

UNIQUE CIRCLE BENDING MACHINE



h: max 50 mm

COVERING WITH CHROME NITRIDE

The top plate part of the machines is manufactured from stainless steel and its surface has been hardened by means of nitration. After these processes, it is covered with a special covering/casing CrN (Chrome Nitride).

By this means special coating, any scratching or corrosion doesn't occur and the bevel part of the part being bent will not be deformed, even if the bevel of the cutter to be bent contacts with the top plate.

RIGID and DURABLE

Body of the machine is made of modular sfero casting, and this added strength and durability to the machine. As the machine has a rigid body, it is able to resist the impacts that will occur during the bending operation for many years.




NO MORE CORROSION and RUSTING

UB-05 bending machines parts have been covered with CrN, and by this means, it is long lasting against corrosion and rusting.

1,5-4 pt. 8-30 mm.

This is one of the bending machines used in the manufacturing of package cutting moulds. UB-05 model in general has been produced with the purpose of making the round parts in a very fast and sensitive way. UB-05 allows faster round bending operation, even faster than the automatic blade bending machines being used today.

Machine enables you to perform this sensitive and fast bending operation by means of its specially machined slides and ergonomic lever structure. By means of this machine, you can bend rule etc. Mould materials in thickness of 1,5 - 4 pt (0,50 - 1,4 mm) and in height of 8-30 mm (Optional 50 mm).

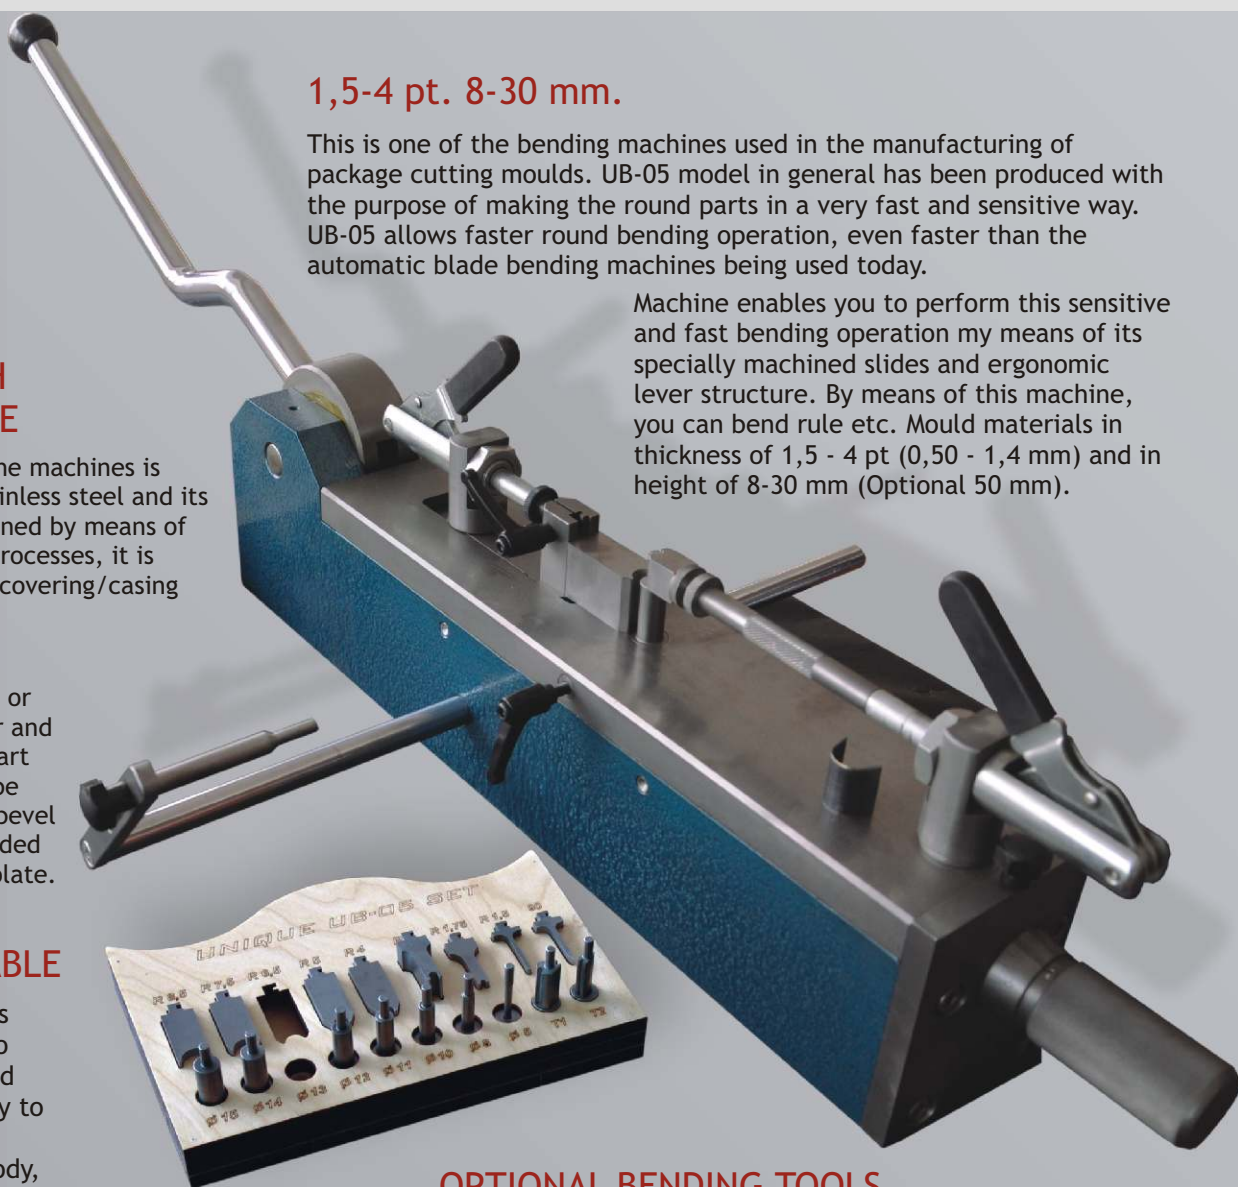

OPTIONAL BENDING TOOLS

Optionally, there is a bending set comprising of 19 parts that we recommend for the purpose of using with the machines. These sets can perform bending operation from 6 mm diameter to 16 mm diameter. Besides, again optionally, there is a bending set comprising of 30 parts specially designed for molders. These sets can perform bending operation from 14 mm diameter to 55 mm diameter. The sets used with the machines are made of imported stroke steels and have been hardened with the most correct heat treatment and cut with wire erosion with 0,01 mm precision.

The machine is guaranteed by our firm for a period of 1 year.